


REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO
A	2C	CORRECTED FREQ. RANGE SPEC	2-8-07	GVC	---

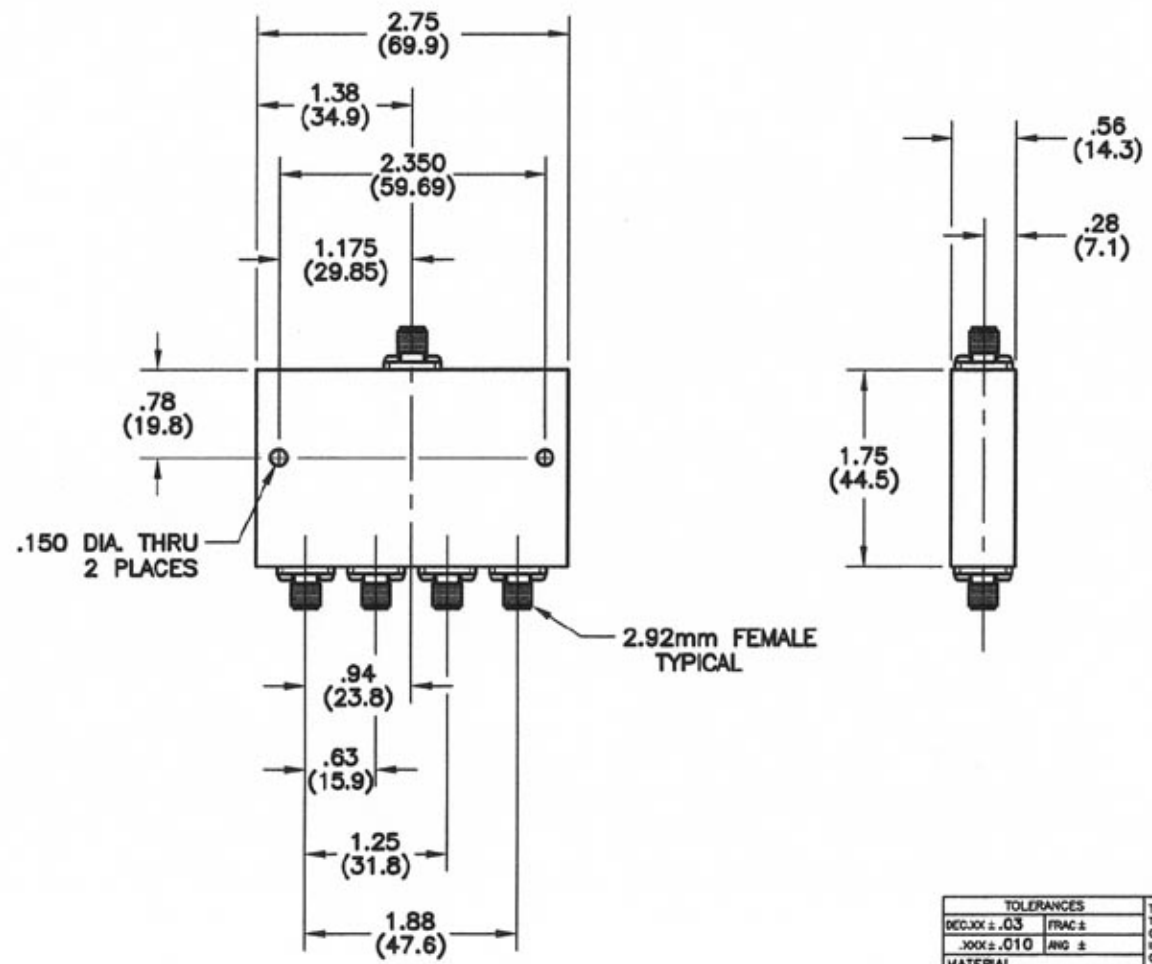

### SPECIFICATIONS

FREQUENCY RANGE: 1.0 TO 2.0 GHz  
 INSERTION LOSS: 0.6 dB MAX.  
 ISOLATION: 20 dB MIN.  
 VSWR: INPUT - 1.40:1 MAX.  
 OUTPUT - 1.40:1 MAX.  
 POWER: 30 WATTS AVG. W/ LOAD VSWR 1.20:1 MAX.

DIMENSIONS: INCHES (MILLIMETERS)

TOLERANCES	
DECIMAL ± .03	FRACTION ±
.XXX ± .010	ANG ±
MATERIAL	
FINISH	
CHK	
APPD	
APPD	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.	
SIGNATURES	DATE
DR G.V. Cothren	1-8-07

**Microwave Devices**  
RF and Microwave Components

**OUTLINE, 4-WAY POWER DIVIDER, MODEL 4PD1.5-2**

CAGE 60674 SIZE B DRAWING NO. 900636-2

DRAWING SCALE 1=1 SHEET 1 OF 1

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 48131 (317) 736-8833

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.