


4

3

2

1

REVISIONS				
REV	ZONE	DESCRIPTION	DATE	BY ECO
A	2C	CORRECTED FREQ. RANGE SPEC	2-8-07	GVC --

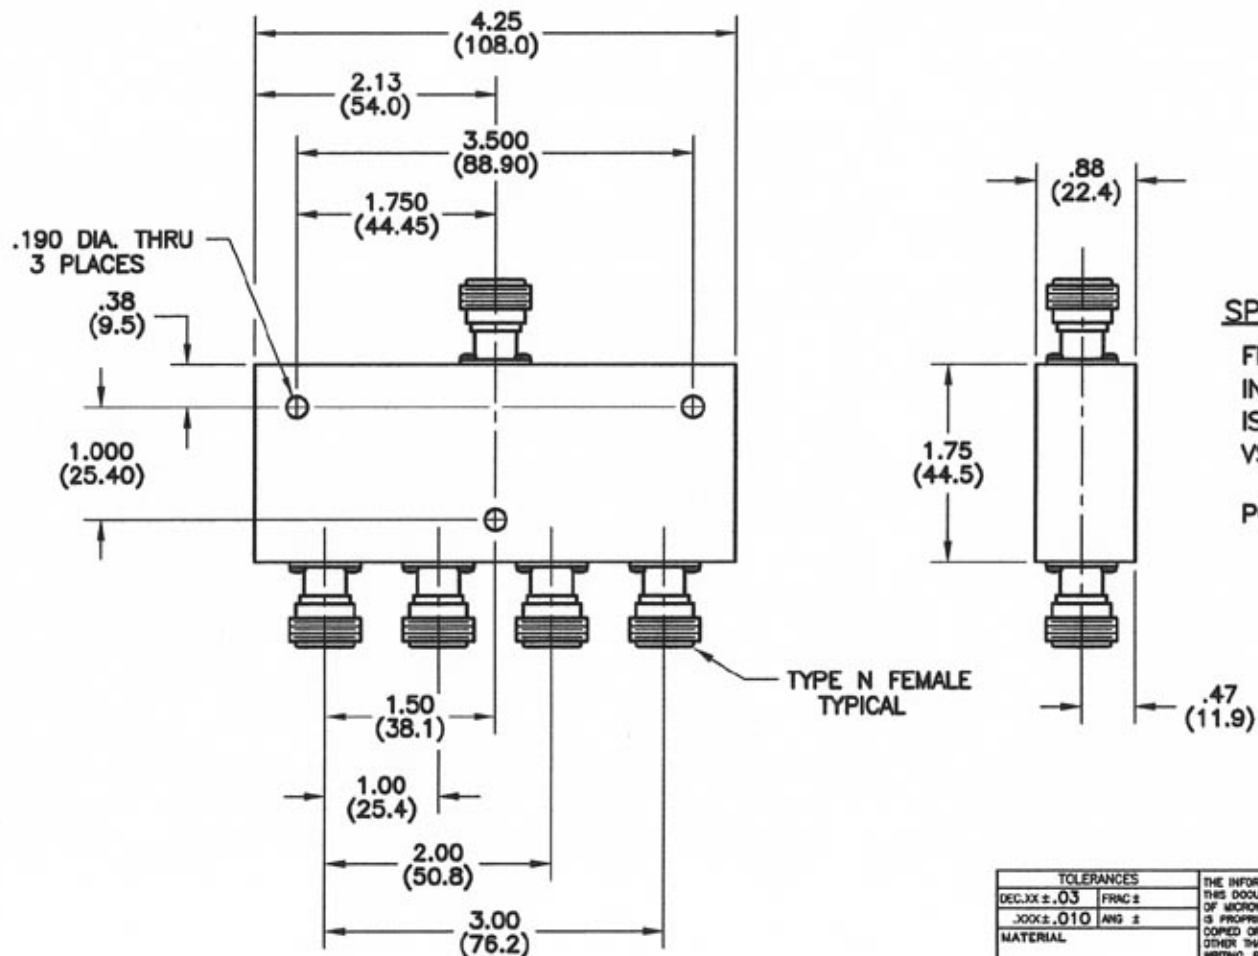

### SPECIFICATIONS

FREQUENCY RANGE: 1.0 TO 2.0 GHz  
 INSERTION LOSS: 0.6 dB MAX.  
 ISOLATION: 20 dB MIN.  
 VSWR: INPUT - 1.40:1 MAX.  
 OUTPUT - 1.40:1 MAX.  
 POWER: 30 WATTS AVG. W/ LOAD VSWR  
 1.20:1 MAX.

DIMENSIONS: INCHES  
(MILLIMETERS)

TOLERANCES	
DEC.XX ± .03	FRNC ±
.XXX ± .010	ANG ±
MATERIAL	

SIGNATURES		DATE
DR	G.V.Cothren	1-8-07
CHK		
APPD		
APPD		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.

**MICROWAVE DEVICES**  
RF and Microwave Components

OUTLINE, 4PD1.5N  
 4 WAY POWER DIVIDER

CAGE SIZE DRAWING NO.  
 60674 B 900636

DRAWING SCALE 1=1 SHEET 1 OF 1

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 46131  
 (317) 736-8833

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

4

3

2

1