
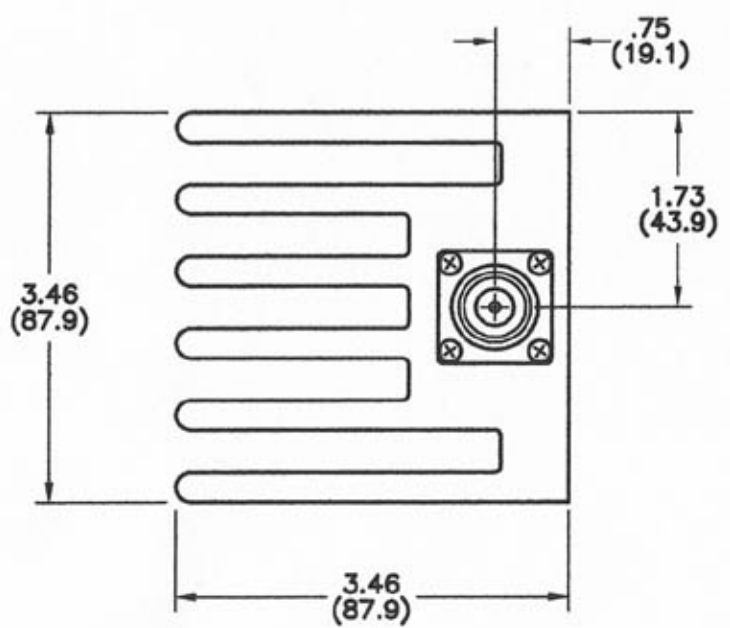


REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO

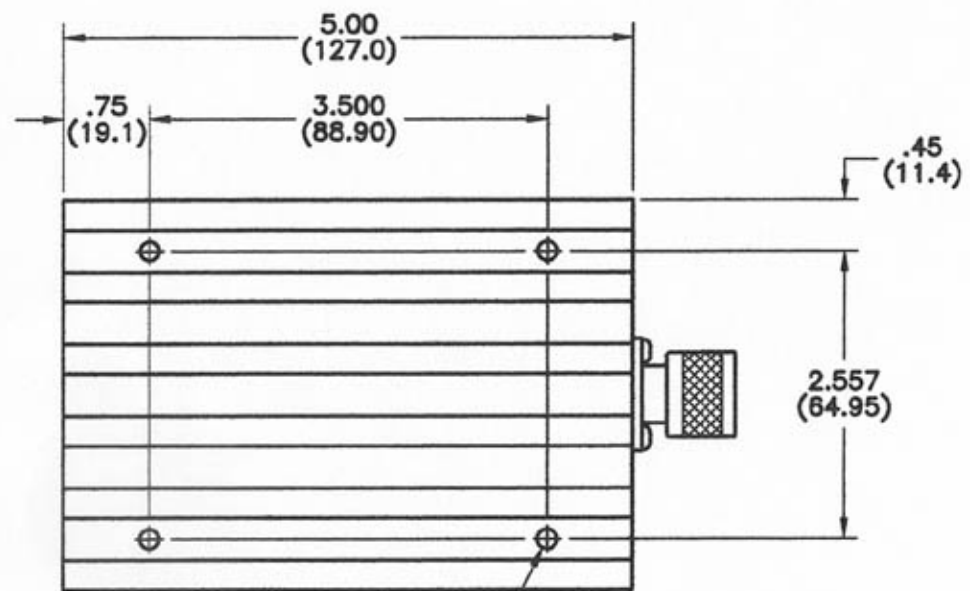

.172(4.37) DIAMETER THRU
4 HOLES

SPECIFICATIONS

FREQUENCY RANGE - DC TO 6.0 GHz
 IMPEDANCE - 50 OHMS
 VSWR (DC - 2.0 GHz) - 1.20:1
 (2.0 - 4.0 GHz) - 1.28:1
 (4.0 - 6.0 GHz) - 1.30:1
 INPUT POWER (AVG.) - 150 WATTS
 (PEAK) - 2000 WATTS
 OPERATING TEMPERATURE - -55°C TO +125°C
 CONNECTOR TYPES - TYPE N OR TNC, PLUG OR JACK
 (TYPE N PLUG SHOWN)

DIMENSIONS: INCHES
(MILLIMETERS)

TOLERANCES		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IF IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.
DECIMAL ± .03	FRACTION ±	
.0008 ± .010 AND ±		
MATERIAL		
FINISH		
SIGNATURES		DATE
DR	G.V.Cothren	8-29-68
CHK		
APPD		
APPO		

MICROWAVE DEVICES
(RF and Microwave Components)

**OUTLINE, MODEL 6150LX6
TERMINATION, 150 WATT**

CAGE	SIZE	DRAWING NO.
60674	B	900772
DRAWING SCALE 1=1		SHEET 1 OF 1

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 46131
(317) 736-8633

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.