



REVISIONS				
REV	ZONE	DESCRIPTION	DATE	BY ECO

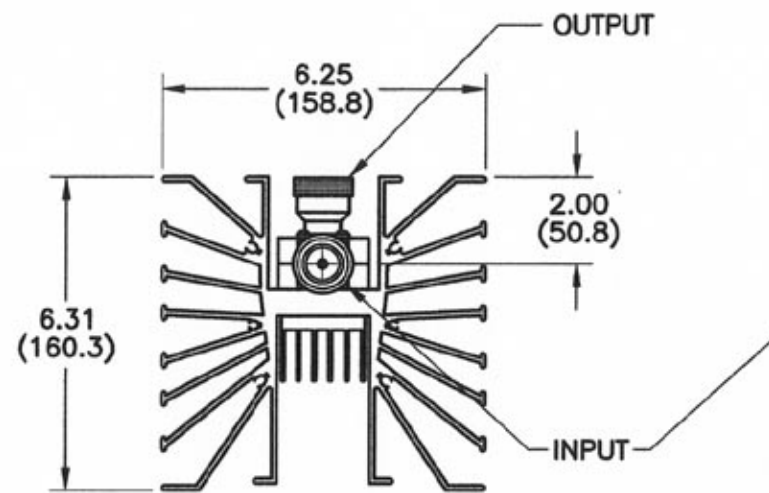

OUTPUT HIDDEN, SHOWN FOR REFERENCE ONLY

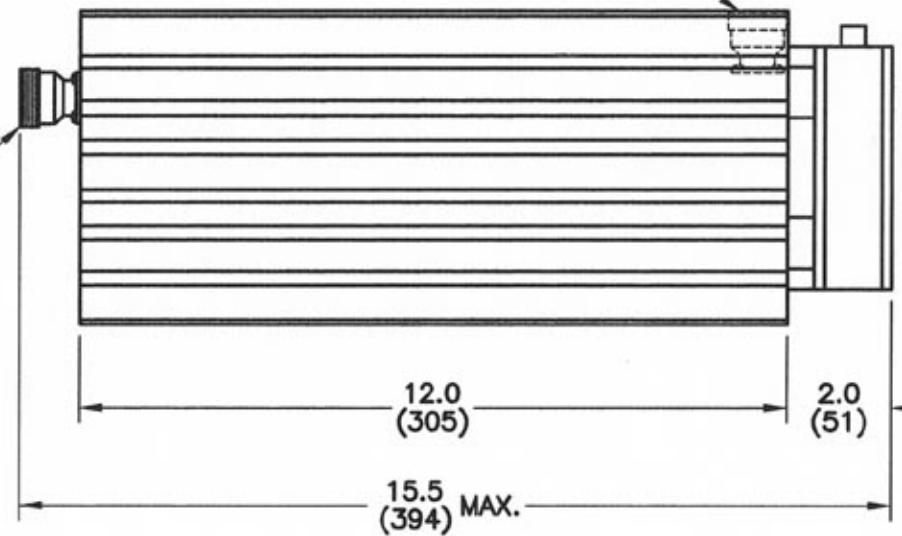

UNIT IS NOT BI-DIRECTIONAL

SPECIFICATIONS:

- IMPEDANCE: 50 OHMS
- FREQUENCY RANGE: DC TO 2.4 GHz
- VSWR (MAX): 1.25:1-DC TO 1 GHz
1.35:1-1 TO 2.4 GHz
- PEAK POWER: 2kW MAX.
- WEIGHT: 17 lbs (7.7kg) MAX.
- ATTENUATION VALUE: 3 TO 40dB
- ATTEN. ACCURACY: ±.3dB OR 3% DC TO 1 GHz
±.75dB OR 5% 1 TO 2.4 GHz
WHICHEVER IS GREATER
- CONNECTORS: 7/16 DIN MALE AND/OR FEMALE (FEMALES SHOWN)
- COOLING: CONVECTION W/ FORCED AIR

TOLERANCES	
DEC.XI ± .05	FRAC ±
.X ± .1	ANG ±
MATERIAL	
SEE NOTES	
FINISH	
SEE NOTES	
CHK	
APPD	
APPD	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.	
SIGNATURES	DATE
DR G.V.Cothren	3-5-07

MICROWAVE DEVICES
RF and Microwave Components

MA-51000/XD7
1000 W. ATTENUATOR

CAGE	SIZE	DRAWING NO.
60674	B	900062-1

DRAWING SCALE: *n/n* SHEET 1 OF 1

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 46131 (317) 736-8833

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.