
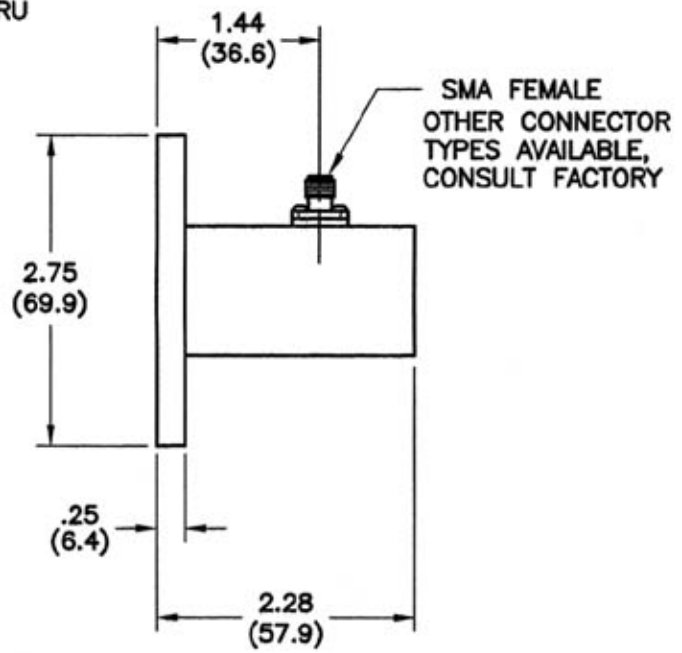


REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO

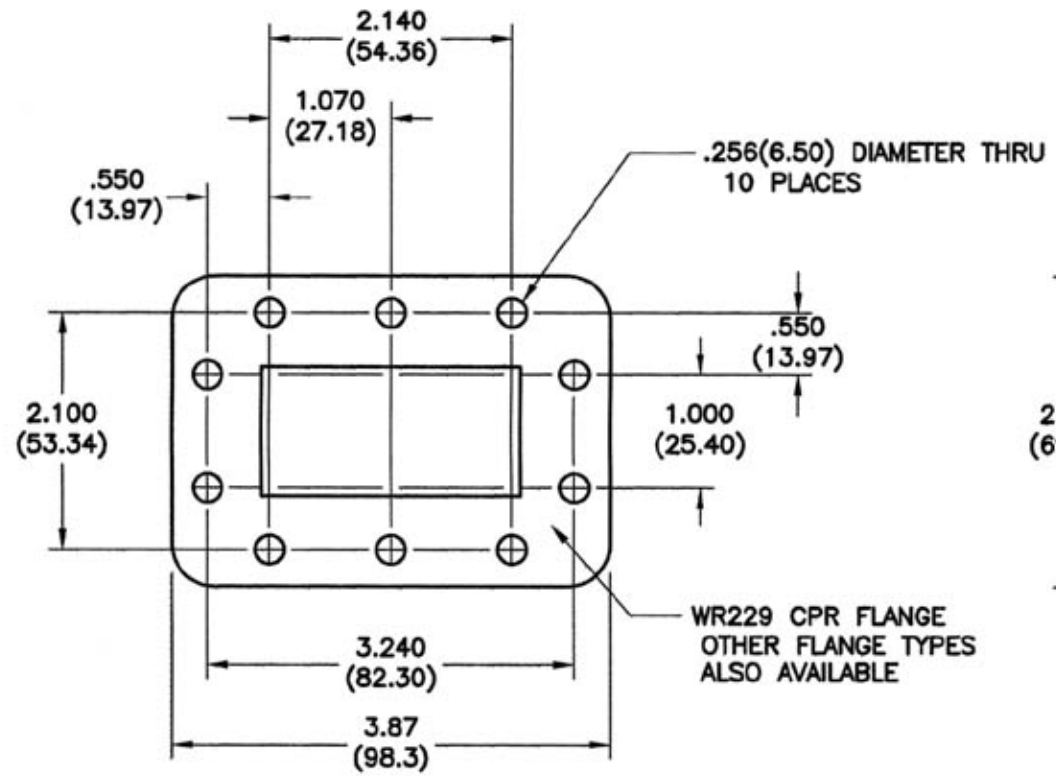

**SPECIFICATIONS**

FREQUENCY RANGE: 3.30 TO 4.95 GHz  
 INSERTION LOSS: 0.16 dB MAX.  
 VSWR: 1.15:1 NOM., 1.25:1 MAX. (ENTIRE BAND)  
 POWER RATING: 50 W. AVG., 3.0 KW PEAK  
 CONNECTOR: SMA FEMALE  
 MATERIAL: ALUMINUM, STD. - BRASS OR COPPER AVAILABLE  
 FINISH: YELLOW CHROMATE (IRIDITE) PAINTED FINISHES AVAILABLE

DIMENSIONS: INCHES  
(MILLIMETERS)

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 46131  
(317) 736-8833

TOLERANCES		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.
DEC.XX ± .03	FRNC ±	
.XXX ± .010	ANG ±	
MATERIAL		
FINISH		SIGNATURES
		DR G.V.Cothren
		DATE
		B-12-08
		CHK
		APPD
		APPD

**MICROWAVE DEVICES**  
RF and Microwave Components

**ADAPTER, WAVEGUIDE TO COAX, WA229-SF-CPR**

CAGE 60674 SIZE B DRAWING NO. 900810

DRAWING SCALE 1=1 SHEET 1 OF 1