


4

3

2

1

REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECC

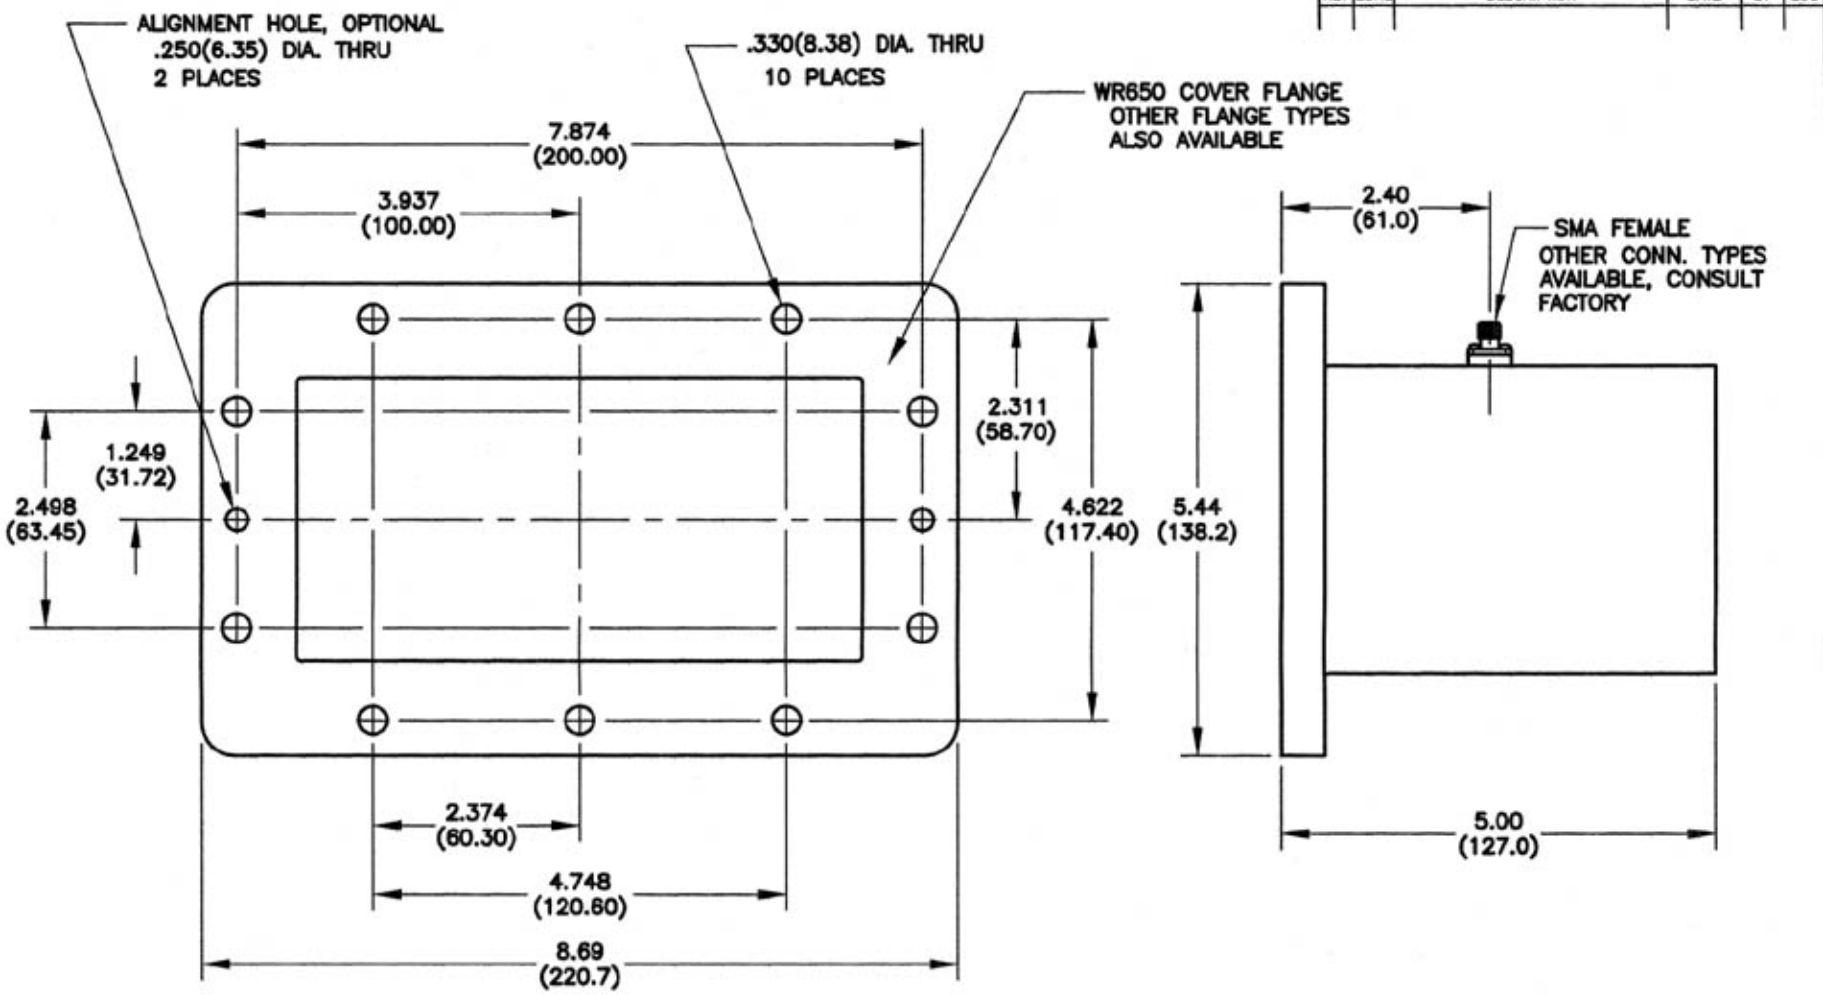

**SPECIFICATIONS**  
 FREQUENCY RANGE: 1.12 TO 1.70 GHz  
 INSERTION LOSS: 0.12 dB MAX.  
 VSWR: 1.15:1 NOM., 1.25:1 MAX. (ENTIRE BAND)  
 POWER RATING: 200 W AVG., 3.0 KW PEAK  
 CONNECTOR: TYPE N FEMALE  
 MATERIAL: ALUMINUM, STD. BRASS OR COPPER ALSO AVAILABLE  
 FINISH: YELLOW CHROMATE (IRIDITE) PAINTED FINISHES AVAILABLE

DIMENSIONS: INCHES (MILLIMETERS)

<b>TOLERANCES</b> DEC. XX ± .03 FRACTION ANG ± .010 ANG ±		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.		<b>MICROWAVE DEVICES</b> <small>(RF and Microwave Components)</small>	
<b>MATERIAL</b> _____		<b>SIGNATURES</b> DR. G.V. Cothron CHK. _____ APPD. _____ APPD. _____		<b>DATE</b> 8-14-09	
<b>FINISH</b> _____		<b>CAGE</b> 60674		<b>DRAWING NO.</b> 900805-1	
<b>CONTRACT</b> CONTACT MICROWAVE DEVICES - 1150 N. DEANWAL RD. FRANKLIN, IN 48131 (317) 756-8833		<b>DRAWING SCALE</b> _____		<b>SHEET 1 OF 1</b>	

4

3

2

1