


4

3

2

1

REVISIONS				
REV	ZONE	DESCRIPTION	DATE	BY ECO

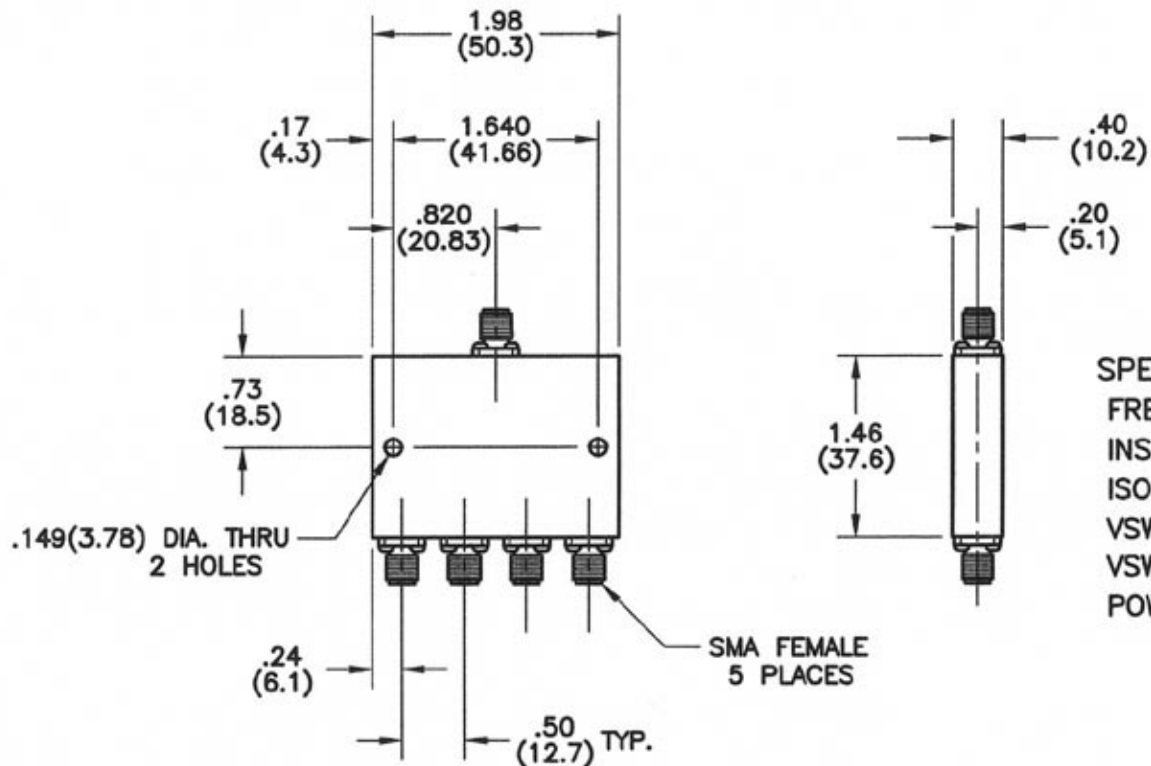

SPECIFICATIONS:

FREQUENCY RANGE: 8.0 - 12.4 GHz

INSERTION LOSS: 0.8 dB MAX.

ISOLATION: 18 dB MIN.

VSWR (COMMON PORT): 1.45:1 MAX.

VSWR (OUTPUT PORTS): 1.35:1 MAX.

POWER RATING: 30 WATTS AVG., WITH LOAD
VSWR OF 1.20:1 MIN.

DIMENSIONS: INCHES
(MILLIMETERS)

TOLERANCES		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.
DEC.XX ± .03	FRAC ±	
.XXX ± .010	ANG ±	
MATERIAL		
FINISH		SIGNATURES
DR	G.V.Cothren	DATE
CHK		2-19-07
APPD		
APPD		

MICROWAVE DEVICES
(RF and Microwave Components)

**OUTLINE, 4PD10.0S
4 WAY POWER DIVIDER**

CAGE	SIZE	DRAWING NO.
60674	B	900649-1
DRAWING SCALE 1=1		SHEET 1 OF 1

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD.
(317) 736-8833 FRANKLIN, IN 46131

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

4

3

2

1