


4

3

2


1

REVISIONS					
REV	ZONE	DESCRIPTION	DATE	BY	ECO

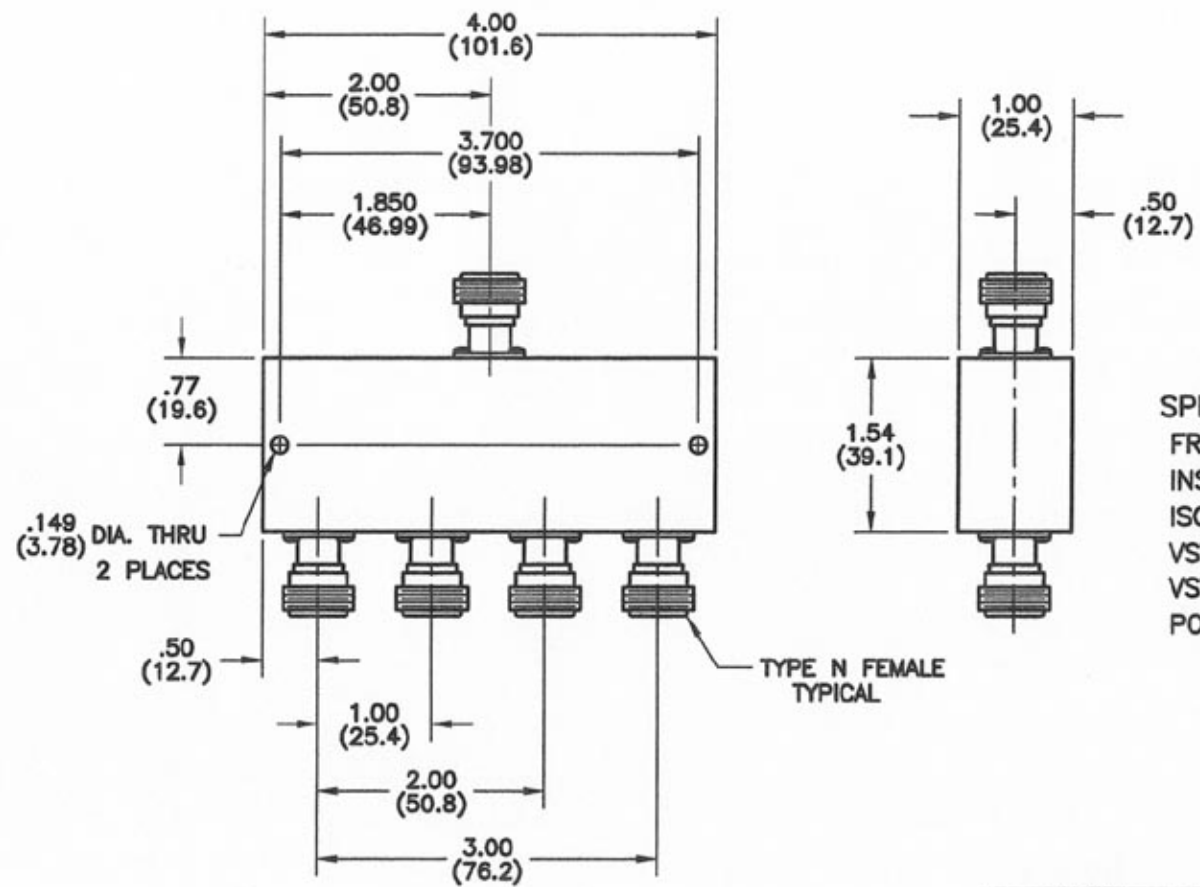

SPECIFICATIONS:
 FREQUENCY RANGE: 4.0 - 8.0 GHz
 INSERTION LOSS: 0.5 dB MAX.
 ISOLATION: 19 dB MIN.
 VSWR (COMMON PORT): 1.50:1 MAX.
 VSWR (OUTPUT PORTS): 1.40:1 MAX.
 POWER RATING: 30 WATTS AVG., WITH LOAD
 VSWR OF 1.20:1 MIN.

DIMENSIONS: INCHES (MILLIMETERS)

TOLERANCES		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF MICROWAVE DEVICES, INC. AND IS PROPRIETARY. IT IS NOT TO BE COPIED OR USED FOR ANY PURPOSE OTHER THAN AS INSTRUCTED, IN WRITING, BY MICROWAVE DEVICES, INC.	 RF and Microwave Components	
DEC.XX ± .03	FRAC ±			
.XXX ± .010	ANG ±			
MATERIAL				
SIGNATURES		DATE		
DR	G.V. Cathron	3-14-07		
CHK				
APPD				
APPD				

OUTLINE, 4PD6.0N		
4 WAY POWER DIVIDER		
CAGE	SIZE	DRAWING NO.
60674	B	900502-3
DRAWING SCALE 1=1		SHEET 1 OF 1

CONTACT: MICROWAVE DEVICES - 1150 N. GRAHAM RD. FRANKLIN, IN 46131
 (317) 736-8833 DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

4

3

2

1